

Ultra V Pro Plus

HALF-CELL N-Type TOPCon BIFACIAL MODULE

TYPE: STPXXXS - C78/Nsh+



POWER OUTPUT

610-630W

MAX EFFICIENCY

22.8%

Features



High module conversion efficiency

Module efficiency up to **22.8%** achieved through advanced cell technology and manufacturing process



Lower operating temperature

Lower operating temperature and temperature coefficient increases the power output



Suntech current sorting process

Up to **2%** power loss caused by current mismatch could be diminished by current sorting technique to maximize system power output



Extended wind and snow load tests

Module certified to withstand extreme wind (2400 Pascal) and snow loads (5400 Pascal) *



Excellent weak light performance


More power output in weak light condition, such as cloudy, morning and sunset



Withstanding harsh environment

Reliable quality leads to a better sustainability even in harsh environment like desert, farm and coastline

Industry-leading Warranty **

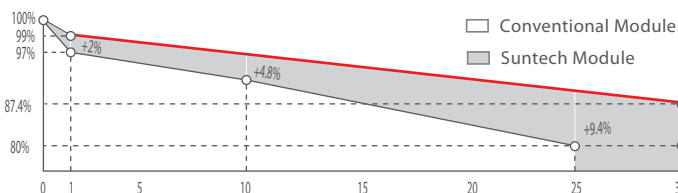

- ◆ First year power degradation: 1%
- ◆ Annual degradation: 0.40%
- ◆ Product warranty: 12 years
- ◆ linear warranty: 30 years

Certifications and Standards

CE IEC 61730 IEC 61215
 SA 8000 Social Responsibility Standards
 ISO 9001 Quality Management System
 ISO 14001 Environment Management System
 ISO 45001 Occupational Health and Safety
 IEC TS 62941 Guideline for module design qualification and type approval




* Please refer to Suntech Standard Module Installation Manual for details.
 ** Please refer to Suntech Limited Warranty for details.

*** WEEE only for EU market.
 **** Suntech reserves the right to the final interpretation of the warranty by Munich Re.

Ultra V Pro STPXXXS - C78/Nsh+ 610-630W

Mechanical Characteristics

Solar Cell	N-type Monocrystalline silicon 182 mm
No. of Cells	156 (6 × 26)
Dimensions	2441 × 1134 × 35 mm (96.1 × 44.6 × 1.4 inches)
Weight	35.1 kgs (77.4 lbs.)
Front \ Back Glass	2.0+2.0 mm (0.079+0.079inches) semi-tempered glass
Output Cables	4.0 mm ² , (-) 350 mm and (+) 160 mm in length or customized length
Junction Box	IP68 rated (3 bypass diodes)
Operating Module Temperature	-40 °C to +85 °C
Maximum System Voltage	1500 V DC (IEC)
Maximum Series Fuse Rating	25 A
Power Tolerance	0/+5 W
Refer. Bifaciality Factor	(80 ± 5)%
Packing Configuration	Packaging box dimensions (mm) : 2470×1130×1269 Packaging box weight (kg) : 1163 31 Pieces per pallet 558 Pieces per container / 40 'HC

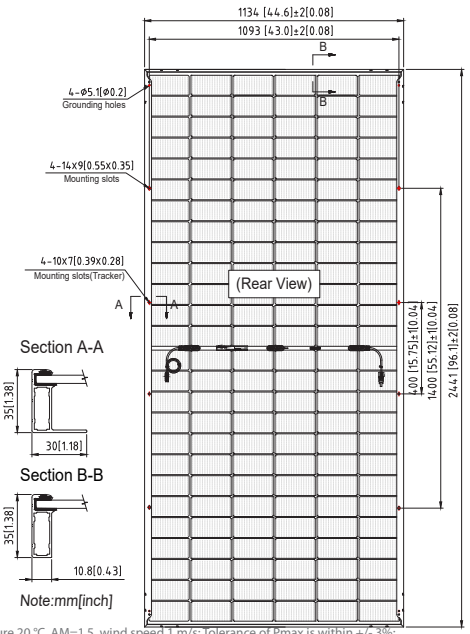

Electrical Characteristics

STC: Irradiance 1000 W/m², module temperature 25 °C, AM=1.5; NMOT: Irradiance 800 W/m², ambient temperature 20 °C, AM=1.5, wind speed 1 m/s; Tolerance of Pmax is within ±7-3%.

Module Type	STP630S-C78/Nmh+		STP625S-C78/Nmh+		STP620S-C78/Nmh+		STP615S-C78/Nmh+		STP610S-C78/Nmh+	
	STC	NMOT	STC	NMOT	STC	NMOT	STC	NMOT	STC	NMOT
Maximum Power (Pmax/W)	630	479.5	625	475.9	620	471.7	615	468.4	610	464.5
Optimum Operating Voltage (Vmp/V)	45.26	43	45.14	42.9	45.02	42.7	44.9	42.6	44.78	42.5
Optimum Operating Current (Imp/A)	13.92	11.15	13.85	11.1	13.77	11.04	13.7	10.99	13.62	10.93
Open Circuit Voltage (Voc/V)	54.46	51.7	54.34	51.6	54.22	51.5	54.1	51.4	53.98	51.2
Short Circuit Current (Isc/A)	14.54	11.72	14.47	11.67	14.4	11.61	14.33	11.56	14.26	11.5
Module Efficiency (%)	22.8		22.6		22.4		22.2		22.0	

For tracker installation, please turn to Suntech for mechanical load information.

Different Rearside Power Gain

Reference to 620S Front

Rearside Power Gain	5%	15%	25%
Maximum Power at STC (Pmax)	651.0	713.0	775.0
Optimum Operating Voltage (Vmp/V)	45.0	45.0	45.1
Optimum Operating Current (Imp/A)	14.46	15.84	17.21
Open Circuit Voltage (Voc/V)	54.2	54.2	54.3
Short Circuit Current (Isc/A)	15.12	16.56	18.00
Module Efficiency (%)	23.5	25.8	28.0

Temperature Characteristics

Nominal Module Operating Temperature (NMOT)	42 ± 2 °C
Temperature Coefficient of Pmax	-0.30%/°C
Temperature Coefficient of Voc	-0.25%/°C
Temperature Coefficient of Isc	0.046%/°C

Information on how to install and operate this product is available in the installation instruction. All values indicated in this data sheet are subject to change without prior announcement. The specifications may vary slightly. All specifications are in accordance with standard EN 50380. Color differences of the modules relative to the figures as well as discolorations of/in the modules which do not impair their proper functioning are possible and do not constitute a deviation from the specification.

Graphs

Current-Voltage & Power-Voltage (630S)

